



PRODUCT DATA SHEET

WPM11416

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 10 - 300 MHz
Power: 10,000 W CW

13.56 MHz Test: Calibration Points

-5%	Center Frequency	+5%
12.882 MHz	13.56 MHz	14.238 MHz

60 MHz Test: Calibration Points

-5%	Center Frequency	+5%
57 MHz	60 MHz	63 MHz

Mechanical Specifications:




Type:	Connectorized
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Size:	6.0 x 3.0 x 2.24"

Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11416-501	SQS Female	SQS Female
WPM11416-7502	SQS Male	SQS Female
WPM11416-QC-3	QC Block	QC Block

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	2/12/2018	CS

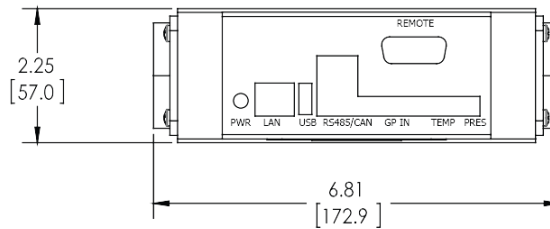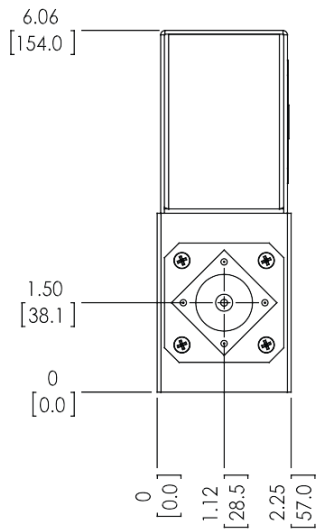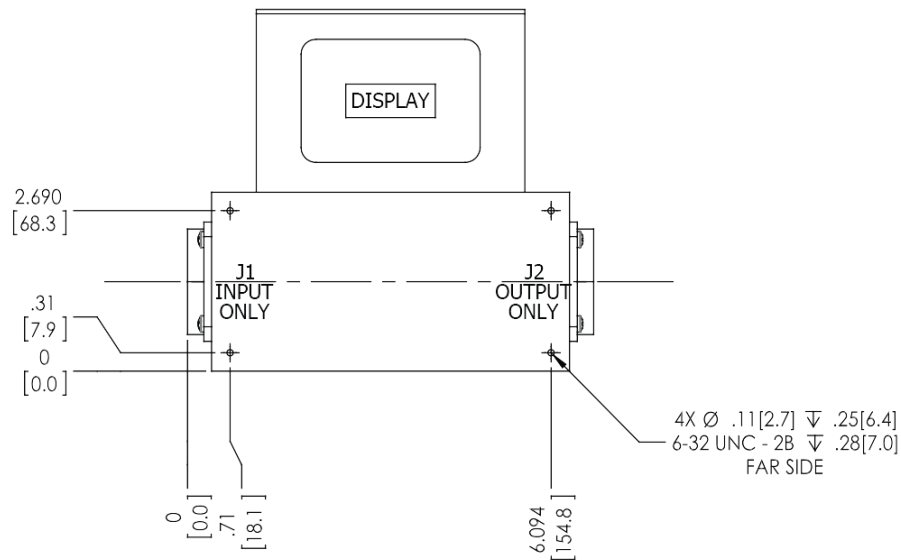

<div>UNLESS OTHERWISE SPECIFIED</div> <div><div><div>• INTERPRET DRAWING MAY VARY</div><div>• DIMENSIONS PER ASME 14.5M-2010</div><div>• DIMENSIONAL UNITS FOR USE ONLY</div><div>• DIMENSIONS ARE IN INCHES (mm)</div><div>• DIMENSIONAL UNITS APPLY BEFORE PROCESSING</div><div>• TOLERANCES: ANGLES ± .2° 3 PL ± .005 (.13) 2 PL ± .015 (.4) • REMOVE ALL BURRS AND SHARP EDGES R.03 MAX • CONCENTRICITY MACHINED DIA: .002 FIM • MACHINE TOOL MISHAPTON .003 MAX</div></div></div> <div>WPM11416 USED ON</div> <div>APPLICATION</div> <div>THIRD ANGLE PROJECTION</div>		OWN	FLP	2/9/2018	<div><div><div></div><div>WERLATONE</div><div>SINCE 1965</div></div><div>17 Jon Barrett Rd Patterson, NY 12563</div></div>				
		CHK	CS	2/9/2018		TITLE			
		ENGR		DATE		SIZE	CAGE CODE	DWG NO	REV
		TPFR		DATE		B	28812	21583-500	-
		QA		DATE		SCALE	1:2	SHEET 1 OF 1	
		RLSE		DATE					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com