

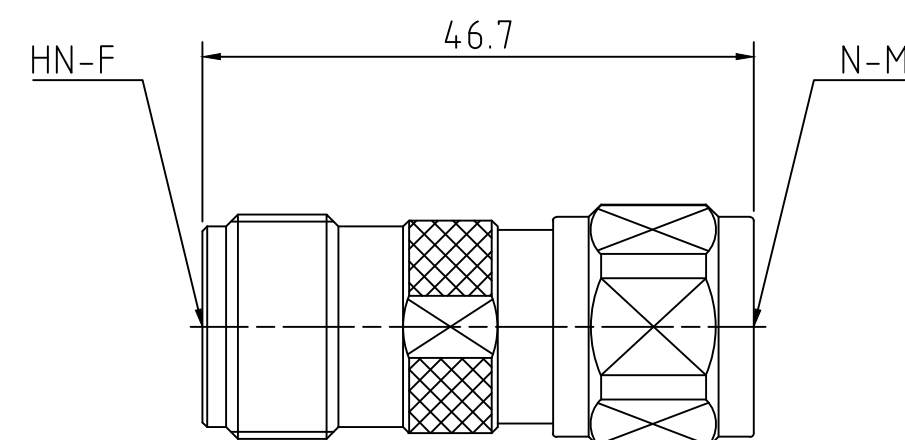
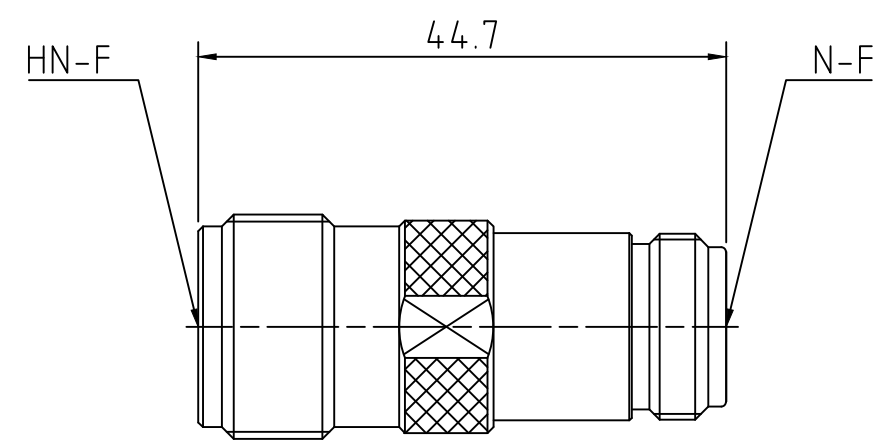


转接器

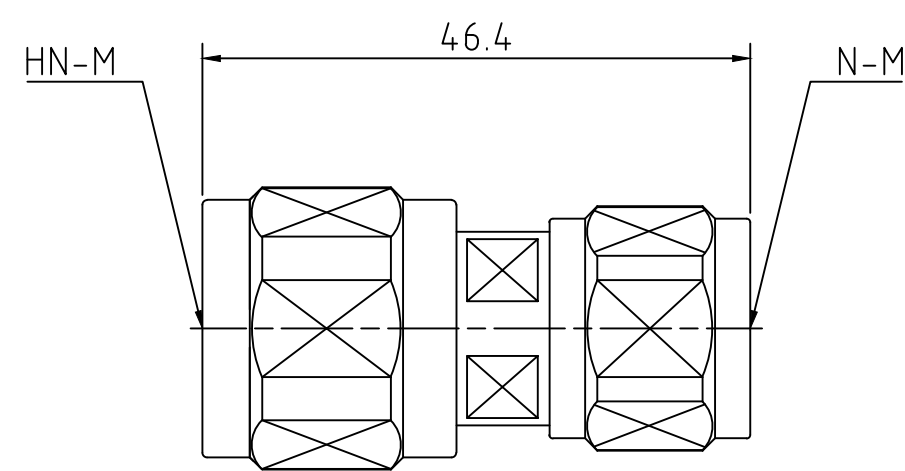

转接器/Adapter HN-N(JK) HN-N(JJ) HN-N(KK) HN-N(KJ) 四款

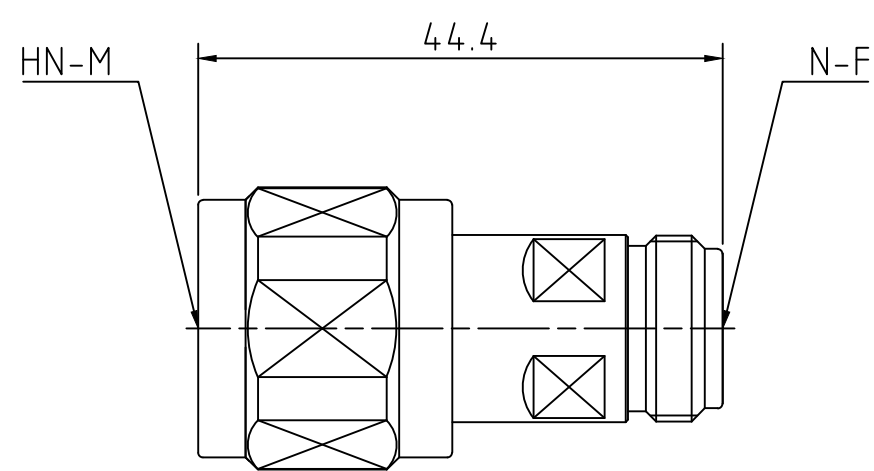

主要技术特性 TECHNICAL CHARACTERISTICS

温度范围 Temp.range	-65～+165℃
特性阻抗 Impedance	50Ω
频率范围 Frequency Range	DC-3GHz
耐压 Withstand Voltage	3000V rms
接触电阻 Contact resistance	Center Contact 1 milliohms max. Outer Contact 0.5 milliohms max.
绝缘电阻 Insulation resistance	10000 megaohms min.
插入损耗 Insertion loss	0.25dB
电压驻波比VSWR	≤1.2
连接器耐久性Connector durability	≥500次 second

材料与涂镀 MATERIAL & PLATING

壳体 shell	黄铜 brass	镀镍或三元合金 nickel or CuSnZn3 plated
插孔 socket	铍青铜 beryllinm	镀金 gold plated
绝缘体 in sulator	聚四氟乙烯 PTFE	----