


RF Mobile Test Probe

MP180-SP29 DC To 6GHz

产品特点:

- 1.工作频率高
- 2.测试寿命长
- 3.高频性能稳定
- 4.驻波及损耗低



产品型号: MP180-SP29

Connectors1: SMPM-Male

Connectors2: Probe-SWJ

电气性能:

技术指标	描述	参数
频率 (Frequency Range)		DC-6Ghz
阻抗 (Impedance)		50Ω
回波损耗 (Return loss)		≥17.7dB@DC~3GHz ≥12.7dB@3~6GHz
插入损耗 (Insertion loss)		<0.4dB@DC~6GHz
介质耐压 (Dielectric Strength)		≥AC200V
接触电阻 (contact resistance)	内导体	≤50MΩ
	外导体	≤20MΩ

www.juncoax.com

名称	材质	镀层
内导体 (Inner conductor)	Beryllium Copper	Gold plated
外导体(Outer conductor)	Brass	Gold plated
绝缘体(Insulator)	PTFE	N/A
弹簧(Spring)	SWP-B/SUS304	Gold plated
测试寿命(Test life)	1M cycles	
温度范围(Temperature range)	-55℃~+155℃	






上海军友射频技术有限公司 Shanghai JunCoax RF Technologies Co., Ltd.

电话 (Tel): 021-6976 传真 (Fax): 021-6976 0393 (Mail): sales@juncoax.com 网址: www.juncoax.com

20151118

RF Mobile Test Probe

电气性能测试 (Electrical performance test) :

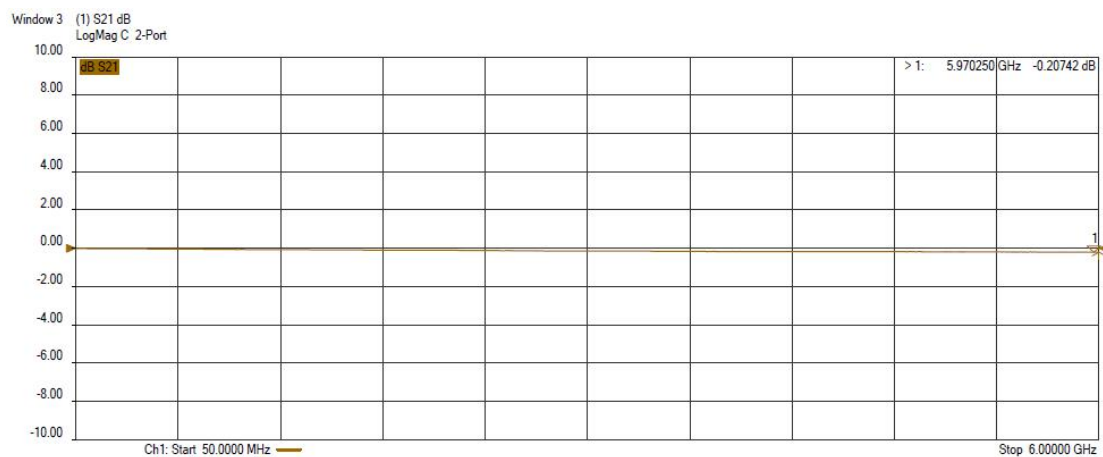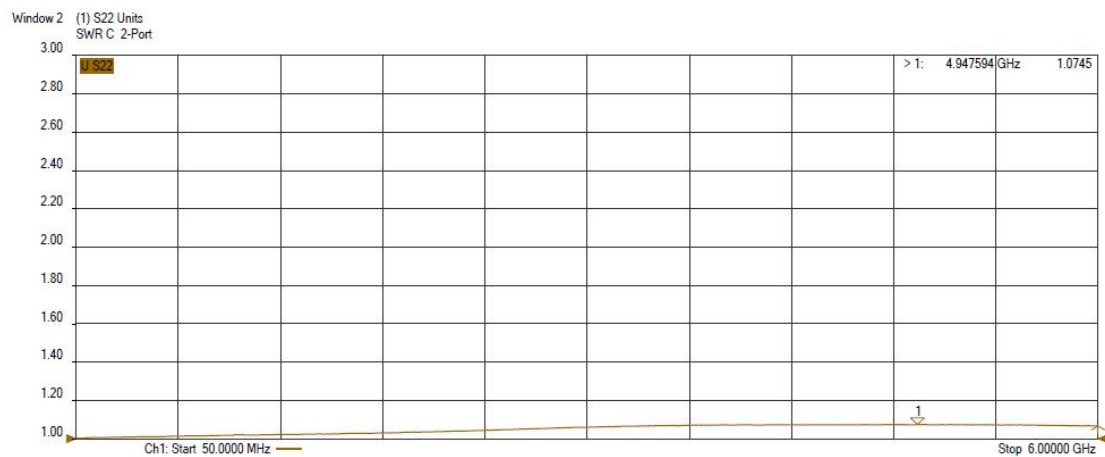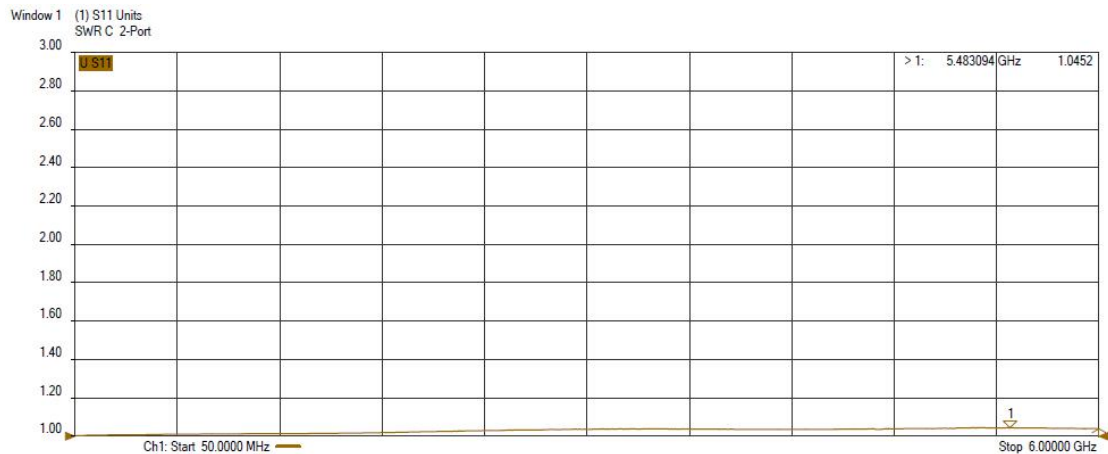


上海军友射频技术有限公司 Shanghai JunCoax RF Technologies Co., Ltd.

电话 (Tel) : 021-6976 传真 (Fax) : 021-6976 0393 (Mail) : sales@juncoax.com 网址: www.juncoax.com

20151118

RF Mobile Test Probe

产品外观尺寸:

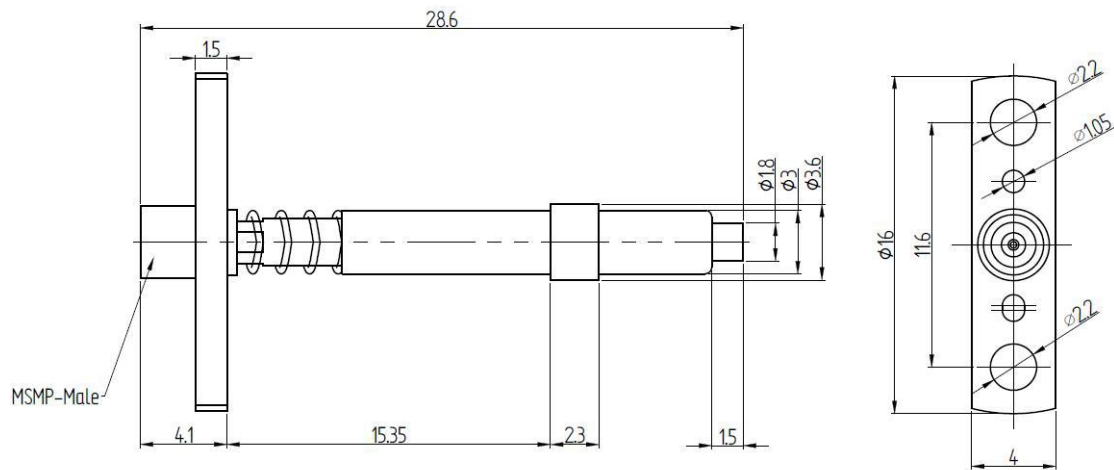

上海军友射频技术有限公司 Shanghai JunCoax RF Technologies Co., Ltd.

电话 (Tel): 021-6976 传真 (Fax): 021-6976 0393 (Mail): sales@juncoax.com 网址: www.juncoax.com

20151118